

## DATA SHEET

### MODULETEK: SFP-GE-T-x-D12

1000BASE-T SFP (Small Form Pluggable) Copper Transceiver  
1.25 Gigabit Ethernet

#### Overview


ModuleTek's SFP-GE-T is a small, hot-swappable RJ45 electrical port module, compliant with Gigabit Ethernet standards and SFP Multi-Source Agreement (MSA) standards, supporting 10M/100M/ 1000M transmission rate. CAT5 class network cable transmission distance of up to 100 meters, good electro-magnetic compatibility, compatible with various brands of hosts, widely used in data centers and enterprise networks. Access to the PHY chip registers is via the I2C interface. It supports 1000BASE-X auto-negotiation, supports the LINK status via the RX\_LOS pin, and supports hosts with SGMII functionality. Meet the certification requirements such as RoHS.

#### Product Features

- Up to 1.25Gb/s bi-directional data links
- Compliant with IEEE 802.3z, IEEE 802.3u, IEEE 802.3ab
- Compliant with SFP MSA
- Hot-pluggable SFP footprint
- Support 10/100/1000BASE-T operation in host systems with SGMII interface
- RJ-45 connector
- Auto-sense MDI/MDIX
- Single power supply 3.3V
- RoHS Compliant

#### Applications

1.25 Gigabit Ethernet

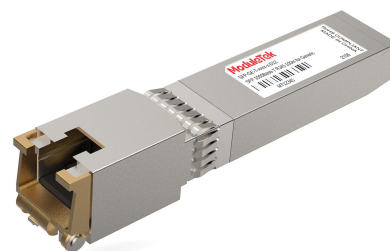

## Ordering Information

Part Number	Product ID	Description	Operating Temperature Range
SFP-GE-T-C-D12	M225105	1000BASE-T SFP Copper RJ-45 Connector 100m Auto Negotiation default mode	0°C to 70°C
SFP-GE-T-E-D12	M225129	1000BASE-T SFP Copper RJ-45 Connector 100m Auto Negotiation default mode	-5°C to 85°C
SFP-GE-T-I-D12	M225108	1000BASE-T SFP Copper RJ-45 Connector 100m Auto Negotiation default mode	-40°C to 85°C
<p><b>Notes:</b></p> <ol style="list-style-type: none"> <li>1. The product with write protection</li> <li>2. Module based on Marvell 88E1112 development</li> <li>3. Operating Temperature Range is case temperature</li> <li>4. The product is Master mode</li> <li>5. The product enables RX_LOS function, which can be turned on or off according to customer needs</li> <li>6. The product does not implement receiver suppression</li> <li>7. Product ID is the short order number of our product standard model</li> </ol>			
<p><b>For More Information:</b>            ModuleTek Limited            Web: <a href="http://www.moduletek.com">www.moduletek.com</a>            Email: <a href="mailto:sales@moduletek.com">sales@moduletek.com</a></p>			

## General Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Data Rate	DR	10		1000	Mb/sec	1
Cable Length	CL			100	m	2
Bit Error Rate	BER			$10^{-12}$		
Storage Temperature	T <sub>STO</sub>	-40		85	°C	3
Supply Current	I <sub>CC</sub>		370	420	mA	
Input Voltage	V <sub>CC</sub>	3.14	3.3	3.46	V	
Maximum Voltage	V <sub>MAX</sub>			4	V	
Power Consumption	P		1.22	1.38	W	

**Notes:**

1. IEEE 802.3 compatible
2. Category 5 UTP
3. Ambient temperature

## High Speed Electrical Interface Host-SFP

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Single ended Input swing	V <sub>IN_PP</sub>	250		1200	mV	
Single ended output swing	V <sub>OUT_PP</sub>	275		800	mV	
Rise Time /Fall Time(20%-80%)	t <sub>r</sub> /t <sub>f</sub>		175		ps	
Tx Input impedance	Z <sub>IN</sub>		50		ohm	1
Rx Output impedance	Z <sub>OUT</sub>		50		ohm	1

**Notes:**

1. Single ended

## High Speed Electrical Interface Transmission Line-SFP

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Line Frequency	$F_L$		125		MHz	1
Tx Output Impedance Differential	$Z_{OUT\_TX}$		100		Ohm	2
Rx Input Impedance Differential	$Z_{IN\_RX}$		100		Ohm	2

**Notes:**

1. 5-level encoding
2. For all frequencies between 1MHz and 125MHz

## Low Speed Electrical Signal

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
SFP Output Low	$V_{OL}$	0		0.5	V	1
SFP Output High	$V_{OH}$	Host_ $V_{CC}$ -0.5		Host_ $V_{CC}$ +0.3	V	1
SFP Input Low	$V_{IL}$	0		0.8	V	1
SFP Input High	$V_{IH}$	2		$V_{CC}$ +0.3	V	1

**Notes:**

1. External 4.7-10k ohm pull-up resistor required

## I2C Memory Map

Address A0					
IIC Addr	Size	Name	Description	Values (HEX)	Remarks
0	1	Identifier	SFP or SFP+	03	
1	1	Ext. Identifier	GBIC/SFP function is defined by two-wire interface ID only	04	
2	1	Connector	RJ45 (Registered Jack)	22	
3-10	8	Transceiver	1000BASE-T	00 00 00 08 00 00 00 00	
11	1	Encoding	8B/10B	01	
12	1	BR, Nominal	Nominal Bit Rate 1.3Gb/s	0D	
13	1	Rate Identifier	Type of rate select functionality	00	
14	1	Length(SMF,km)	Link length supported for single mode fiber, units of km	00	

15	1	Length (SMF)	Link length supported for single mode fiber, units of 100 m	00	
16	1	Length (50um)	Link length supported for 50 um OM2 fiber, units of 10 m	00	
17	1	Length (62.5um)	Link length supported for 62.5 um OM1 fiber, units of 10 m	00	
18	1	Length (OM4 or copper cable)	100m	64	
19	1	Length (OM3)	Link length supported for 50 um OM3 fiber, units of 10 m	00	
20-35	16	Vendor name	MODULETEK	4D 4F 44 55 4C 45 54 45 4B 20 20 20 20 20 20 20	
36	1	Transceiver	Code for electronic or optical compatibility	00	
37-39	3	Vendor OUI	SFP vendor IEEE company ID	00 00 00	
40-55	16	Vendor PN	Part number in Order information	-	
56-59	4	Vendor rev	Revision level for part number provided by vendor (ASCII)	-	
60-61	2	Wavelength	Laser wavelength (Passive/Active Cable Specification Compliance)	00 00	
62	1	Unallocated		00	
63	1	CC BASE	Check code for Base ID Fields (addresses 0 to 62)	-	
64-65	2	Options	Indicates which optional transceiver signals are implemented	00 00	
66	1	BR, max	Upper bit rate margin	00	
67	1	BR, min	Lower bit rate margin	00	
68-83	16	Vendor SN	Serial number provided by vendor	Programmed by Factory	
84-91	8	Date code	Year,Month,Day	Programmed by Factory	
92	1	Diagnostic Monitoring Type	Indicates which type of diagnostic monitoring is implemented (if any) in the transceiver	00	

93	1	Enhanced Options	Indicates which optional enhanced features are implemented (if any) in the transceiver	00	
94	1	SFF-8472 Compliance	Indicates which revision of SFF-8472 the transceiver complies with.	00	
95	1	CC EXT	Check code for the Extended ID Fields (addresses 64 to 94)	-	
96-127	32	Vendor Specific	Vendor Specific EEPROM	-	
128-255	128	Vendor Specific	Vendor Specific EEPROM	-	
<b>Address A2 Low</b>					
IIC Addr	Size	Name	Description	Values (HEX)	Remarks
0-94	95	Reserved	Reserved	FF	
95	1	Checksum	0-94 Byte Checksum	-	
96-121	26	Reserved	Reserved	FF	
122	1	Security Level	Security Level: 00=Normal Mode; 01=User Mode (Level 1); 02=Factory Mode (Level 2);	-	
123-126	4	Password Entry	Password Entry Area	00 00 00 00	
127	1	Table Selection	Page Select Byte	00	
<b>Address A2 Page 00h/01h</b>					
IIC Addr	Size	Name	Description	Values (HEX)	Remarks
128-255	128	Upper Memory Map	User Code Area	-	
<b>Address A2 Page 8Ah</b>					
IIC Addr	Size	Name	Description	Values (HEX)	Remarks
128-131	4	Firmware Version Number[4]	Firmware Version Number	-	
132-135	4	Total Running Time In Second	Total Running Time In Second	-	
<b>Address A2 Page F0h</b>					
IIC Addr	Size	Name	Description	Values (HEX)	Remarks
128-131	4	Password1 Long	Level 1 Password	00 00 10 11	

132	1	Working Mode	00=AUTO; 01=SGMII; 02=FULL;	-	
133	1	Always Enable Los	00=Disable; 01=Enable;	-	
134	1	Disable A0 WP	00=A0 With Write Protection; 01=A0 Without Write Protection	00	
135	1	Disable A2T00T01 WP	00=A2 T00T01 With Write Protection; 01=A2 T00T01 Without Write Protection	00	
136	1	Enable A2TF9 Access	Access 88E1112 Directly From Table F9 00=Disable; 01=Enable	00	

**Notes:**

- 1.Password entry area default 00000000 , read out as last written value
- 2.Module with write protection , enter the security level 1 writeable

## User Mode


Module	Level 1 Default Password	Password Can Be Changed	Permissions
SFP-GE-T	00001011	YES(A2 TF0)	1、 Read And Write A0、 A2 T00/T01
			2、 Read A2 T8A
			3、 Read And Write A2 TF0

**Notes:**

- 1.detail in I2C memory map

## Dimensions

Weight: 24.5g

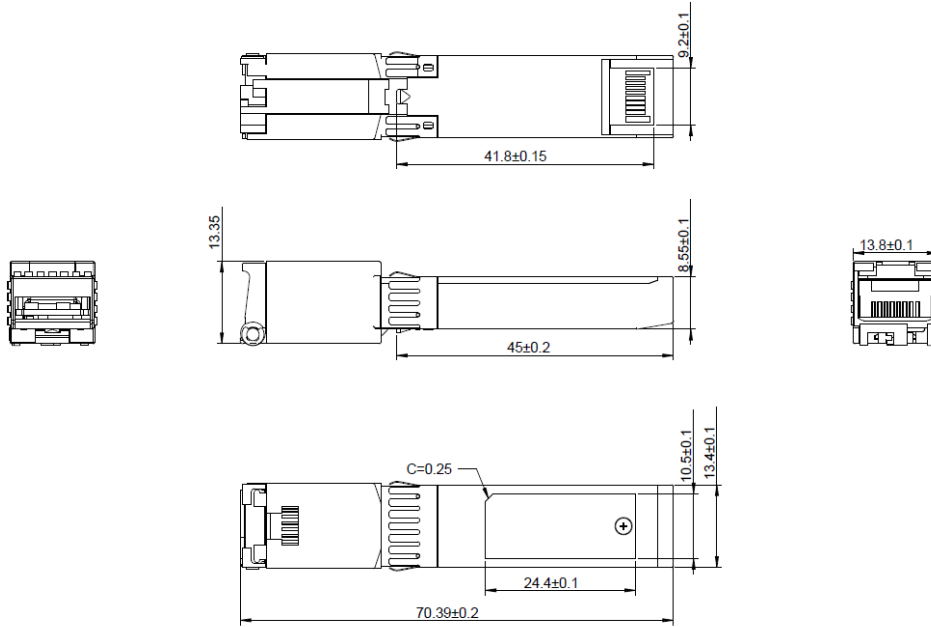


ALL DIMENSIONS ARE  $\pm 0.2$ mm UNLESS OTHERWISE SPECIFIED  
UNIT: mm






## Electrical Pad Layout

Top view

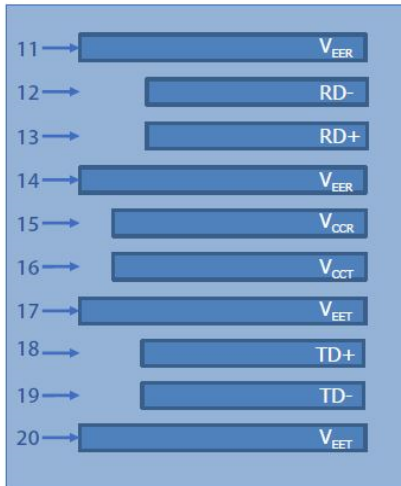

Bottom view

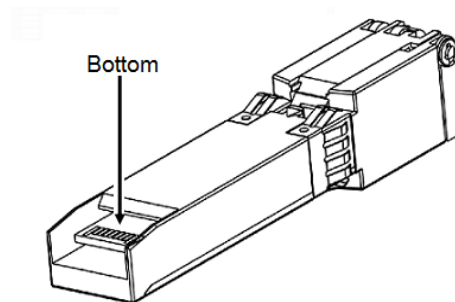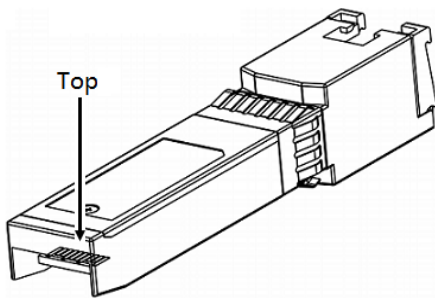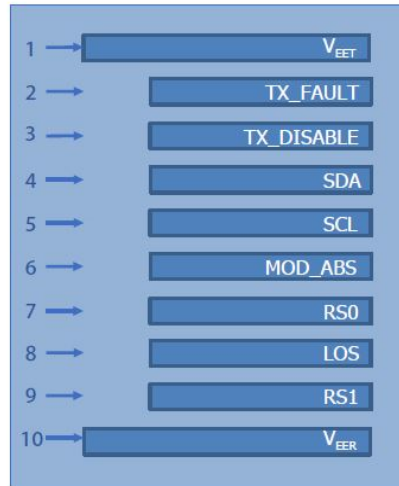

## Pin Assignment

PIN #	Symbol	Description	Remarks
1	V <sub>EET</sub>	Transmitter ground (common with receiver ground)	1
2	TX_FAULT	Transmitter Fault. Not supported	
3	TX_DISABLE	Transmitter Disable. PHY disabled on high or open	2
4	MOD_DEF(2)	Module Definition 2. Data line for serial ID	3
5	MOD_DEF(1)	2Module Definition 1. Clock line for serial ID	3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module	3
7	Rate Select	No connection required	
8	LOS	Loss of Signal	
9	V <sub>EER</sub>	Receiver ground (common with transmitter ground)	1
10	V <sub>EER</sub>	Receiver ground (common with transmitter ground)	1
11	V <sub>EER</sub>	Receiver ground (common with transmitter ground)	1
12	RD-	Receiver Inverted DATA out. AC coupled	
13	RD+	Receiver Non-inverted DATA out. AC coupled	
14	V <sub>EER</sub>	Receiver ground (common with transmitter ground)	1
15	V <sub>CCR</sub>	Receiver power supply	
16	V <sub>CCT</sub>	Transmitter power supply	
17	V <sub>EET</sub>	Transmitter ground (common with receiver ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC coupled	
19	TD-	Transmitter Inverted DATA in. AC coupled	
20	V <sub>EET</sub>	Transmitter ground (common with receiver ground)	1

### Notes:

1. Circuit ground is connected to chassis ground
2. Disabled: T<sub>DIS</sub>>2V or open, Enabled: T<sub>DIS</sub><0.8V
3. Should Be pulled up with 4.7k –10k ohm on host board to a voltage between 2V and 3.6V

## References

1. IEEE standard 802.3. IEEE Standard Department,2005.